

Exploiting Semidefinite Relaxations in Constraint Programming

Willem Jan van Hoeve
 CWI, P.O. Box 94079, 1090 GB Amsterdam, The Netherlands
 W.J.van.Hoeve@cwi.nl

July 16, 2004

Abstract

Constraint programming uses enumeration and search tree pruning to solve combinatorial optimization problems. In order to speed up this solution process, we investigate the use of semidefinite relaxations within constraint programming. In principle, we use the solution of a semidefinite relaxation to guide the traversal of the search tree, using a limited discrepancy search strategy. Furthermore, a semidefinite relaxation produces a bound for the solution value, which is used to prune parts of the search tree. Experimental results on stable set and maximum clique problem instances show that constraint programming can indeed greatly benefit from semidefinite relaxations.

1 Introduction

Constraint programming models for combinatorial optimization problems consist of variables on finite domains, constraints on those variables and an objective function to be optimized. In general, constraint programming solvers use domain value enumeration to solve combinatorial optimization problems. By propagation of the constraints (i.e. removal of inconsistent values), large parts of the resulting search tree may be pruned. Because combinatorial optimization problems are NP-hard in general, constraint propagation is essential to make constraint programming solvers practically applicable. Another essential part concerns the enumeration scheme, that defines and traverses a search tree. Variable and value ordering heuristics as well as tree traversal heuristics greatly influence the performance of the resulting constraint programming solver.

In this work we investigate the possibility of using semidefinite relaxations in constraint programming. This investigation involves the extraction of semidefinite relaxations from a constraint programming model, and the actual use of the relaxation inside the solution scheme. We propose to use the solution of a semidefinite relaxation to define search tree ordering and traversal heuristics. Effectively, this means that our enumeration scheme starts at the suggestion

made by the semidefinite relaxation, and gradually scans a wider area around this solution. Moreover, we use the solution value of the semidefinite relaxation as a bound for the objective function, which results in stronger pruning. By applying a semidefinite relaxation in this way, we hope to speed up the constraint programming solver significantly. These ideas were motivated by a previous work [1], in which a linear relaxation was proved to be helpful in constraint programming.

We implemented our method and provide experimental results on the stable set problem and the maximum clique problem, two classical combinatorial optimization problems. We compare our method with a standard constraint programming solver, and with specialized solvers for maximum clique problems. As computational results will show, our method obtains far better results than a standard constraint programming solver. However, on maximum clique problems, the specialized solvers appear to be much faster than our method.

This paper is an extended and revised version of [2]. In the current version, a more general view on the proposed method is presented. Namely, in [2] the method was proposed for stable set problems only, while in this paper we propose the method to be applied to any constraint programming problem, although not all problems will be equally suitable. Furthermore, in [2] the method uses a subproblem generation framework on which limited discrepancy search is applied. In the current work it has been replaced by limited discrepancy search on single values, which is more concise while preserving the behaviour of the algorithm. Finally, more experimental results are presented, including problem characterizations and instances of the DIMACS benchmark set for the maximum clique problem.

The outline of the paper is as follows. The next section gives a motivation for the approach proposed in this work. Then, in Section 3 some preliminaries on constraint and semidefinite programming are given. A description of our solution framework is given in Section 4. In Section 5 we introduce the stable set problem and the maximum clique problem, integer optimization formulations and a semidefinite relaxation. Section 6 presents the computational results. We conclude in Section 7 with a summary and future directions.

2 Motivation

NP-hard combinatorial optimization problems are often solved with the use of a polynomially solvable relaxation. Often (continuous) linear relaxations are chosen for this purpose. Also within constraint programming, linear relaxations are widely used, see [3] for an overview. Let us first motivate why in this paper a semidefinite relaxation is used rather than a linear relaxation. For some problems, for instance for the stable set problem, standard linear relaxations are not very tight and not informative. One way to overcome this problem is to identify and add linear constraints that strengthen the relaxation. But it may be time-consuming to identify such constraints, and by enlarging the model the solution process may slow down.

On the other hand, several papers on approximation theory following [4] have shown the tightness of semidefinite relaxations. However, being tighter, semidefinite programs are more time-consuming to solve than linear programs in practice. Hence one has to trade strength for computation time. For some (large scale) applications, semidefinite relaxations are well-suited to be used within a branch and bound framework (see for instance [5]). Moreover, our intention is not to solve a relaxation at every node of the search tree. Instead, we propose to solve only once a relaxation, before entering the search tree. Therefore, we are willing to make the trade-off in favour of the semidefinite relaxation.

Finally, investigating the possibility of using semidefinite relaxations in constraint programming is worthwhile in itself. To our knowledge the cross-fertilization of semidefinite programming and constraint programming has not yet been investigated. Hence, this paper should be seen as a first step toward the cooperation of constraint programming and semidefinite programming.

3 Preliminaries

3.1 Constraint Programming

In this section we briefly introduce the basic concepts of constraint programming that are used in this paper. A thorough explanation of the principles of constraint programming can be found in [6].

A constraint programming model consists of a set of variables, corresponding variable domains, and a set of constraints restricting those variables. In case of optimization problems, also an objective function is added. In this work the variable domains are assumed to be finite. A constraint c is defined as a subset of the Cartesian product of the domains of the variables that are in c . Constraints may be of any form (linear, nonlinear, logical, symbolic, etcetera), provided that the constraint programming solver contains an algorithm to check its satisfiability, or even to identify globally inconsistent domain values.

Basically, a constraint programming solver tries to find a solution of the model by enumerating all possible variable-value assignments such that the constraints are all satisfied. Because there are exponentially many possible assignments, constraint propagation is needed to prune large parts of the corresponding search tree. Constraint propagation tries to remove inconsistent values from variable domains before the variables are actually instantiated. Hence, one doesn't need to generate the whole search tree, but only a part of it, while still preserving a complete (exact) solution scheme. The general solution scheme is an iterative process in which branching decisions are made, and the effects are propagated subsequently.

Variable and value ordering heuristics, which define the search tree, greatly influence the constraint propagation, and with that the performance of the solver. If no suitable variable and value ordering heuristics are available, constraint programming solvers often use a lexicographic variable and value ordering, and depth-first search to traverse the tree. However, when good heuristics

are available, they should be applied.

When ‘perfect’ value and variable ordering heuristics are followed, it will lead us directly to the optimal solution (possibly unproven). Although perfect heuristics are often not available, some heuristics come pretty close. In such cases, one should try to deviate from the first heuristic solution as little as possible. This is done by traversing the search tree using a limited discrepancy search strategy (LDS) [7] instead of depth-first search.

LDS is organized in waves of increasing discrepancy from the first solution provided by the heuristic. The first wave (discrepancy 0) exactly follows the heuristic. The next waves (discrepancy i , with $i > 0$), explore all the solutions that can be reached when i derivations from the heuristic are made. Typically, LDS is applied until a maximum discrepancy has been reached, say 3 or 4. Although being incomplete (inexact), the resulting strategy often finds good solutions very fast, provided that the heuristic is informative. Of course LDS can also be applied until all possible discrepancies have been considered, resulting in a complete strategy.

3.2 Semidefinite Programming

In this section we briefly introduce semidefinite programming. A large number of references to papers concerning semidefinite programming are on the web pages [8] and [9]. A general introduction on semidefinite programming applied to combinatorial optimization is given in [10] and [11].

Semidefinite programming makes use of positive semidefinite matrices of variables. A matrix $X \in \mathbb{R}^{n \times n}$ is said to be positive semidefinite (denoted by $X \succeq 0$) when $y^T X y \geq 0$ for all vectors $y \in \mathbb{R}^n$. Semidefinite programs have the form

$$\begin{aligned} \max \quad & \text{tr}(W X) \\ \text{s.t.} \quad & \text{tr}(A_j X) \leq b_j \quad (j = 1, \dots, m) \\ & X \succeq 0. \end{aligned} \tag{1}$$

Here $\text{tr}(X)$ denotes the trace of X , which is the sum of its diagonal elements, i.e. $\text{tr}(X) = \sum_{i=1}^n X_{ii}$. The matrix X , the cost matrix $W \in \mathbb{R}^{n \times n}$ and the constraint matrices $A_j \in \mathbb{R}^{n \times n}$ are supposed to be symmetric. The m reals b_j and the m matrices A_j define m constraints.

We can view semidefinite programming as an extension of linear programming. Namely, when the matrices W and A_j ($j = 1, \dots, m$) are all supposed to be diagonal matrices¹, the resulting semidefinite program is equal to a linear program, where the matrix X is replaced by a non-negative vector of variables $x \in \mathbb{R}^n$. In particular, then a semidefinite programming constraint $\text{tr}(A_j X) \leq b_j$ corresponds to a linear programming constraint $a_j^T x \leq b_j$, where a_j represents the diagonal of A_j .

Theoretically, semidefinite programs have been proved to be polynomially solvable to any fixed precision using the so-called ellipsoid method (see for in-

¹A diagonal matrix is a matrix with nonnegative values on its diagonal entries only.

stance [12]). In practice, nowadays fast ‘interior point’ methods are being used for this purpose (see [13] for an overview).

Semidefinite programs may serve as a continuous relaxation for (integer) combinatorial optimization problems. Unfortunately, it is not a trivial task to obtain a computationally efficient semidefinite program that provides a tight solution for a given problem. However, for a number of combinatorial optimization problems such semidefinite relaxations do exist, for instance the stable set problem, the maximum cut problem, quadratic programming problems, the maximum satisfiability problem, and many others (see [11] for an overview).

4 Solution Framework

The skeleton of our solution framework is formed by the constraint programming enumeration scheme, or search tree, as explained in Section 3.1. Within this skeleton, we want to use the solution of a semidefinite relaxation to define the variable and value ordering heuristics. In this section we first show how to extract a semidefinite relaxation from a constraint programming model. Then we give a description of the usage of the relaxation within the enumeration scheme.

4.1 Building a Semidefinite Relaxation

We start from a constraint programming model consisting of a set of variables $\{v_1, \dots, v_n\}$, corresponding finite domains $\{D_1, \dots, D_n\}$, a set of constraints and an objective function. From this model we need to extract a semidefinite relaxation. In general, a relaxation is obtained by removing or replacing one or more constraints such that all solutions are preserved. If it is possible to identify a subset of constraints for which a semidefinite relaxation is known, this relaxation can be used inside our framework. Otherwise, we need to build up a relaxation from scratch. This can be done in the following way.

If all domains $D_1, \dots, D_n$ are binary, a semidefinite relaxation can be extracted using a method proposed by [14], which is explained below. In general, however, the domains are non-binary. In that case, we transform the variables v_i and the domains D_i into corresponding binary variables x_{ij} for $i \in \{1, \dots, n\}$ and $j \in D_i$:

$$\begin{aligned} v_i = j &\Leftrightarrow x_{ij} = 1, \\ v_i \neq j &\Leftrightarrow x_{ij} = 0. \end{aligned} \tag{2}$$

We will then use the binary variables x_{ij} to construct a semidefinite relaxation. Of course, the transformation has consequences for the constraints also, which will be discussed below.

The method to transform a model with binary variables into a semidefinite relaxation, presented in [14], is the following. Let $d \in \{0, 1\}^N$ be a vector of binary variables, where N is a positive integer. Construct the $(N+1) \times (N+1)$

variable matrix X as

$$X = \begin{pmatrix} 1 \\ d \end{pmatrix} (1 \ d^\top) = \begin{pmatrix} 1 & d^\top \\ d & dd^\top \end{pmatrix}.$$

Then X can be constrained to satisfy

$$X \succeq 0 \tag{3}$$

$$X_{ii} = X_{0i} \quad \forall i \in \{1, \dots, N\} \tag{4}$$

where the rows and columns of X are indexed from 0 to N . Condition (4) expresses the fact that $d_i^2 = d_i$, which is equivalent to $d_i \in \{0, 1\}$. Note however that the latter constraint is relaxed by requiring X to be positive semidefinite.

The matrix X contains the variables to model our semidefinite relaxation. Obviously, the diagonal entries (as well as the first row and column) of this matrix represent the binary variables from which we started. Using these variables, we need to rewrite (a part of) the original constraints into the form of program (1) in order to build the semidefinite relaxation.

In case the binary variables are obtained from transformation (2), not all constraints may be trivially transformed accordingly. Especially because the original constraints may be of any form. The same holds for the objective function. On the other hand, as we are constructing a relaxation, we may choose among the set of constraints an appropriate subset to include in the relaxation. Moreover, the constraints itself are allowed to be relaxed. Although there is no ‘recipe’ to transform any given original constraint into the form of program (1), one may use results from the literature [11]. For instance, for linear constraints on binary variables a straightforward translation is given in Section 3.2.

4.2 Applying the Semidefinite Relaxation

At this point, we have either identified a subset of constraints for which a semidefinite relaxation exists, or built up our own relaxation. Now we show how to apply the solution to the semidefinite relaxation inside the constraint programming framework, also depicted in Figure 1. In general, the solution to the semidefinite relaxation yields fractional values for its variable matrix. For example, the diagonal variables X_{ii} of the above matrix will be assigned to a value between 0 and 1. These fractional values serve as an indication for the original constraint programming variables. Consider for example again the above matrix X , and suppose it is obtained from non-binary original variables, by transformation (2). Assume that variable X_{ii} corresponds to the binary variable x_{jk} (for some integer j and k), which corresponds to $v_j = k$, where v_j is a constraint programming variable and $k \in D_j$. If variable X_{ii} is close to 1, then also x_{jk} is supposed to be close to 1, which corresponds to assigning $v_j = k$.

Hence, our variable and value ordering heuristics for the constraint programming variables are based upon the fractional solution values of the corresponding variables in the semidefinite relaxation. Our variable ordering heuristic is

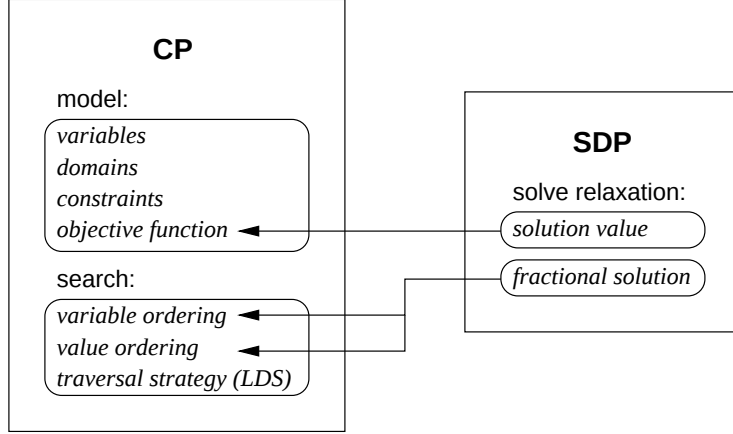


Figure 1: Communication between constraint programming (CP) and semidefinite programming (SDP).

to select first the constraint programming variable for which the corresponding fractional solution is closest to the corresponding integer solution. Our value ordering heuristic is to select first the corresponding suggested value. For example, consider again the above matrix X , obtained from non-binary variables by transformation (2). We select first the variable v_j for which X_{ii} , representing the binary variable x_{jk} , is closest to 1, for some $k \in D_j$ and corresponding integer i . Then we assign value k to variable v_j . We have also implemented a randomized variant of the above variable ordering heuristic. In the randomized case, the selected variable is accepted with a probability proportional to the corresponding fractional value.

We expect the semidefinite relaxation to provide promising values. Therefore the resulting search tree will be traversed using limited discrepancy search, defined in Section 3.1. A last remark concerns the solution value of the semidefinite relaxation, which is used as a bound on the objective function in the constraint programming model. If this bound is tight, which is the case in our experiments, it leads to more propagation and a smaller search space.

5 The Stable Set Problem and Maximum Clique Problem

This section describes the stable set problem and the maximum clique problem (see [15, 16] for a survey), on which we have tested our algorithm. First we give their definitions, and the equivalence of the two problems. Then we will focus on the stable set problem, and formulate it as an integer optimization problem. From this, a semidefinite relaxation is inferred.

5.1 Definitions

Consider an undirected weighted graph $G = (V, E)$, where $V = \{1, \dots, n\}$ is the set of vertices and E a subset of edges $\{(i, j) | i, j \in V, i \neq j\}$ of G , with $|E| = m$. To each vertex $i \in V$ a weight $w_i \in \mathbb{R}$ is assigned (without loss of generality, we can assume all weights to be nonnegative).

A stable set is a set $S \subseteq V$ such that no two vertices in S are joined by an edge in E . The stable set problem is the problem of finding a stable set of maximum total weight in G . This value is called the stable set number of G and is denoted by $\alpha(G)$ ². In the unweighted case (when all weights are equal to 1), this problem amounts to the maximum cardinality stable set problem, which has been shown to be already NP-hard [17].

A clique is a set $C \subseteq V$ such that every two vertices in C are joined by an edge in E . The maximum clique problem is the problem of finding a clique of maximum total weight in G . This value is called the clique number of G and is denoted by $\omega(G)$ ³.

The complement graph of G is $\overline{G} = (V, \overline{E})$, with the same set of vertices $V = \{1, \dots, n\}$, but with edge set $\overline{E} = \{(i, j) | i, j \in V, (i, j) \notin E, i \neq j\}$. It is well known that $\alpha(G) = \omega(\overline{G})$. Hence, a maximum clique problem can be translated into a stable set problem on the complement graph. We will do exactly this in our implementation, and focus on the stable set problem, for which good semidefinite relaxations exist.

5.2 Integer Optimization Formulation

Let us first consider an integer linear programming formulation for the stable set problem. We introduce binary variables to indicate whether or not a vertex belongs to the stable set S . So, for n vertices, we have n integer variables x_i indexed by $i \in V$, with initial domains $\{0, 1\}$. In this way, $x_i = 1$ if vertex i is in S , and $x_i = 0$ otherwise. We can now state the objective function, being the sum of the weights of vertices that are in S , as $\sum_{i=1}^n w_i x_i$. Finally, we define the constraints that forbid two adjacent vertices to be both inside S as $x_i + x_j \leq 1$, for all edges $(i, j) \in E$. Hence the integer linear programming model becomes:

$$\begin{aligned} \alpha(G) = \quad & \max \quad \sum_{i=1}^n w_i x_i \\ \text{s.t.} \quad & x_i + x_j \leq 1 \quad \forall (i, j) \in E \\ & x_i \in \{0, 1\} \quad \forall i \in V. \end{aligned} \tag{5}$$

Another way of describing the same solution set is presented by the following integer quadratic program

$$\begin{aligned} \alpha(G) = \quad & \max \quad \sum_{i=1}^n w_i x_i \\ \text{s.t.} \quad & x_i x_j = 0 \quad \forall (i, j) \in E \\ & x_i^2 = x_i \quad \forall i \in V. \end{aligned} \tag{6}$$

²In the literature $\alpha(G)$ usually denotes the unweighted stable set number. The weighted stable set number is then denoted as $\alpha_w(G)$. In this work, it is not necessary to make this distinction.

³ $\omega_w(G)$ is defined similar to $\alpha_w(G)$ and also not distinguished in this paper.

Note that here the constraint $x_i \in \{0, 1\}$ is replaced by $x_i^2 = x_i$, similar to condition (4) in Section 4. This quadratic formulation will be used below to infer a semidefinite relaxation of the stable set problem.

In fact, both model (5) and model (6) can be used as a constraint programming model. We have chosen the first model, since the quadratic constraints take more time to propagate than the linear constraints, while having the same pruning power. To infer the semidefinite relaxation, however, we will use the equivalent model (6).

5.3 Semidefinite Programming Relaxation

The integer quadratic program (6) gives rise to a well-known semidefinite relaxation introduced by Lovász [18] (see [12] for a comprehensive treatment). The value of the objective function of this relaxation has been named the theta number of a graph G , indicated by $\vartheta(G)$. For its derivation into a form similar to program (1), we will follow the same idea as in Section 4 for the general case.

As our constraint programming model uses binary variables already, we can immediately define the $(n+1) \times (n+1)$ matrix variable X of our relaxation as

$$X = \begin{pmatrix} 1 & x^\top \\ x & xx^\top \end{pmatrix}$$

where the binary vector x again represents the stable set, as in Section 5.2. First we impose the constraints

$$X \succeq 0 \tag{7}$$

$$X_{ii} = X_{0i} \quad \forall i \in \{1, \dots, n\} \tag{8}$$

as described in Section 4. Next we translate the edge constraints $x_i x_j = 0$ from program (6) into $X_{ij} = 0$, because X_{ij} represents $x_i x_j$. In order to translate the objective function, we first define the $(n+1) \times (n+1)$ weight matrix W as

$$\begin{aligned} W_{ii} &= w_i & \forall i \in \{1, \dots, n\}, \\ W_{ij} &= 0 & \forall i \in \{0, \dots, n\}, j \in \{0, \dots, n\}, i \neq j. \end{aligned}$$

Then the objective function translates into $\text{tr}(WX)$. The semidefinite relaxation thus becomes

$$\begin{aligned} \vartheta(G) = \max \quad & \text{tr}(WX) \\ \text{s.t.} \quad & X_{ii} = X_{0i} \quad \forall i \in V \\ & X_{ij} = 0 \quad \forall (i, j) \in E \\ & X \succeq 0. \end{aligned} \tag{9}$$

Note that program (9) can easily be rewritten into the general form of program (1). Namely, $X_{ii} = X_{0i}$ is equal to $\text{tr}(A_i X) = 0$ where the $(n+1) \times (n+1)$ matrix A_i consists of all zeroes, except for $(A_i)_{ii} = 1$, $(A_i)_{i0} = -\frac{1}{2}$ and $(A_i)_{0i} = -\frac{1}{2}$, which makes the corresponding right-hand side (b_i entry) equal to 0 (similarly for the edge constraints).

The theta number also arises from other formulations, different from the above, see [12]. In our implementation we have used the formulation that has been shown to be computationally most efficient among those alternatives [19]. Let us introduce that particular formulation (called ϑ_3 in [12]). Again, let $x \in \{0, 1\}^n$ be a vector of binary variables representing a stable set. Define the $n \times n$ matrix $\tilde{X} = \xi\xi^\top$ where $\xi_i = \frac{\sqrt{w_i}}{\sqrt{\sum_{j=1}^n w_j x_j}} x_i$. Furthermore, let the $n \times n$ cost matrix U be defined as $U_{ij} = \sqrt{w_i w_j}$ for $i, j \in V$. Observe that in these definitions we exploit the fact that $w_i \geq 0$ for all $i \in V$. The following semidefinite program

$$\begin{aligned} \vartheta(G) = \quad & \max \quad \text{tr}(U\tilde{X}) \\ \text{s.t.} \quad & \text{tr}(\tilde{X}) = 1 \\ & \tilde{X}_{ij} = 0 \quad \forall (i, j) \in E \\ & \tilde{X} \succeq 0 \end{aligned} \tag{10}$$

has been shown to also give the theta number of G , see [12]. When (10) is solved to optimality, the scaled diagonal element $\vartheta(G)\tilde{X}_{ii}$ (a fractional value between 0 and 1) serves as an indication for the value of x_i ($i \in V$) in a maximum stable set (see for instance [19]). Again, it is not difficult to rewrite program (10) into the general form of program (1).

Program (10) uses matrices of dimension n and $m + 1$ constraints, while program (9) uses matrices of dimension $n + 1$ and $m + n$ constraints. This gives an indication why program (10) is computationally more efficient.

6 Computational Results

All our experiments are performed on a Sun Enterprise 450 (4 X UltraSPARC-II 400MHz) with maximum 2048 Mb memory size, on which our algorithms only use one processor of 400MHz at a time. As constraint programming solver we use the ILOG Solver library, version 5.1 [20]. As semidefinite programming solver, we use CSDP version 4.1 [21], with the optimized ATLAS 3.4.1 [22] and LAPACK 3.0 [23] libraries for matrix computations. The reason for our choices is that both solvers are among the fastest in their field, and because ILOG Solver is written in C++, and CSDP is written in C, they can be hooked together relatively easy.

We distinguish two algorithms to perform our experiments. The first algorithm is a sole constraint programming solver, which uses a standard enumeration strategy. This means we use a lexicographic variable ordering, and we select domain value 1 before value 0. The resulting search tree is traversed using a depth-first search strategy. After each branching decision, its effect is directly propagated through the constraints. As constraint programming model we have used model (5), as was argued in Section 5.2.

The second algorithm is the one proposed in Section 4. It first solves the semidefinite program (10), and then calls the constraint programming solver. In this case, we use the randomized variable ordering heuristic, defined by the

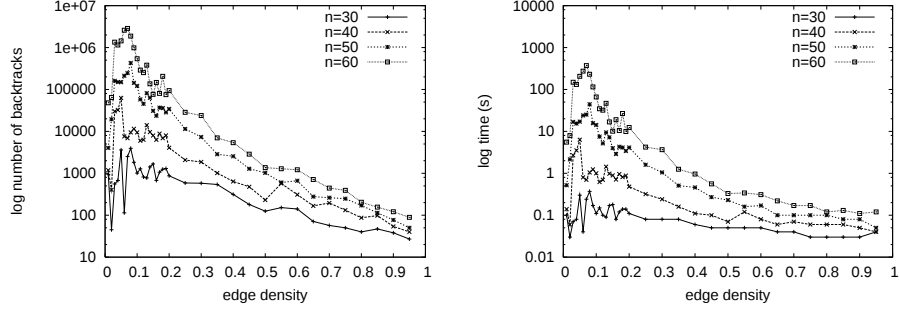


Figure 2: Performance of the constraint programming solver on random instances with n vertices.

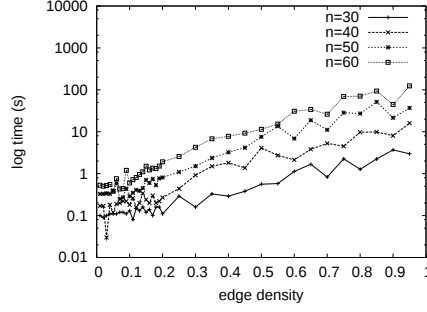


Figure 3: Performance of the semidefinite programming solver on random instances with n vertices.

solution of the semidefinite relaxation. The resulting search tree is traversed using a limited discrepancy search strategy. In fact, in order to improve our starting solution, we repeat the search for the first solution n times, (where n is the number of variables), and the best solution found is the heuristic solution to be followed by the limited discrepancy search strategy.

6.1 Characterization of Problem Instances

We will first identify general characteristics of the constraint programming solver and the semidefinite programming solver applied to stable set problems. It appears that both solvers are highly dependent on the edge density of the graph, i.e. $\frac{m}{\frac{1}{2}(n^2-n)}$ for a graph with n vertices and m edges. We therefore generated random graphs on 30, 40, 50 and 60 vertices, with density ranging from 0.01 up to 0.95. Our aim is to identify the hardness of the instances for both solvers, parametrized by the density. Based upon this information, we can identify the kind of problems our algorithm is suitable for.

We have plotted the performance of both solvers in Figure 2 and Figure 3. Here the constraint programming solver solves the problems to optimality, while the semidefinite programming solver only solves the semidefinite relaxation. For the constraint programming solver, we depict both the number of backtracks and the time needed to prove optimality. For the semidefinite programming solver we only plotted the time needed to solve the relaxation. Namely, this solver does not use a tree search, but a so-called primal-dual interior point algorithm. Note that we use a log-scale for time and number of backtracks in these pictures.

From these figures, we can conclude that the constraint programming solver has the most difficulties with instances up to density around 0.2. Here we see the effect of constraint propagation. As the number of constraints increases, the search tree can be heavily pruned. On the other hand, our semidefinite relaxation suffers from every edge that is added. As the density increases, the semidefinite program increases accordingly, as well as its computation time. Fortunately, for the instances up to 0.2, the computation time for the semidefinite relaxation is very small. Consequently, our algorithm is expected to behave best for graphs that have edge density up to around 0.2. For graphs with a higher density, the constraint programming solver is expected to use less time than the semidefinite programming solver, which makes the application of our method unnecessary.

6.2 Random Weighted and Unweighted Graphs

Our first experiments are performed on random weighted and unweighted graphs. We generated graphs with 50, 75, 100, 125 and 150 vertices and edge density from 0.05, 0.10 and 0.15, corresponding to the interesting problem area. The results are presented in Table 1. Unweighted graphs on n vertices and edge density r are named ‘ $gndr$ ’. Weighted graphs are similarly named ‘ $wgndr$ ’.

The first five columns of the table are dedicated to the instance, reporting its name, the number of vertices n and edges m , the edge density and the (best known) value of a stable set, α . The next three columns (CP) present the performance of the constraint programming solver, reporting the best found estimate of α , the total time and the total number of backtracks needed to prove optimality. The last five columns (SDP+CP) present the performance of our method, where also a column has been added for the discrepancy of the best found value (best discr), and a column for the time needed by the semidefinite programming solver (sdp time).

Table 1 shows that our approach always finds a better (or equally good) estimate for α than the standard constraint programming approach. This becomes more obvious for larger n . However, there are two (out of 30) instances in which our method needs substantially more time to achieve this result (g75d015 and wg75d010). A final observation concerns the discrepancy of the best found solutions. Our method appears to find those (often optimal) solutions at rather low discrepancies.

Table 1: Computational results on random graphs, with n vertices and m edges. All times are in seconds. The time limit is set to 1000 seconds.

instance					CP		SDP + CP					
name	n	m	edge density	α	α	total time	back-tracks	α	best discr	sdp time	total time	back-tracks
g50d005	50	70	0.06	27	27	5.51	50567	27	0	0.26	0.27	0
g50d010	50	114	0.09	22	22	28.54	256932	22	0	0.35	0.36	0
g50d015	50	190	0.16	17	17	5.83	48969	17	0	0.49	0.49	0
g75d005	75	138	0.05	36	≥ 35	limit		36	0	0.72	0.73	0
g75d010	75	282	0.10	≥ 25	≥ 25	limit		≥ 25	5	1.4	limit	
g75d015	75	426	0.15	21	21	170.56	1209019	21	0	2.81	664.92	1641692
g100d005	100	254	0.05	43	≥ 40	limit		43	0	2.07	2.1	0
g100d010	100	508	0.10	≥ 31	≥ 30	limit		≥ 31	0	4.94	limit	
g100d015	100	736	0.15	≥ 24	≥ 24	limit		≥ 24	4	9.81	limit	
g125d005	125	393	0.05	≥ 49	≥ 44	limit		≥ 49	1	4.92	limit	
g125d010	125	791	0.10	≥ 33	≥ 30	limit		≥ 33	6	12.58	limit	
g125d015	125	1160	0.15	≥ 27	≥ 24	limit		≥ 27	1	29.29	limit	
g150d005	150	545	0.05	≥ 52	≥ 44	limit		≥ 52	3	10.09	limit	
g150d010	150	1111	0.10	≥ 38	≥ 32	limit		≥ 38	4	27.48	limit	
g150d015	150	1566	0.14	≥ 29	≥ 26	limit		≥ 29	8	57.86	limit	
wg50d005	50	70	0.06	740	740	4.41	30528	740	0	0.29	0.3	0
wg50d010	50	126	0.10	636	636	3.12	19608	636	0	0.41	0.41	0
wg50d015	50	171	0.14	568	568	4.09	25533	568	0	0.59	4.93	13042
wg75d005	75	128	0.05	1761	1761	744.29	4036453	1761	0	1.05	1.07	0
wg75d010	75	284	0.10	1198	1198	325.92	1764478	1198	13	1.9	924.2	1974913
wg75d015	75	409	0.15	972	972	40.31	208146	972	0	3.62	51.08	87490
wg100d005	100	233	0.05	2302	≥ 2176	limit		2302	0	2.59	2.62	0
wg100d010	100	488	0.10	≥ 1778	≥ 1778	limit		≥ 1778	2	6.4	limit	
wg100d015	100	750	0.15	≥ 1412	≥ 1412	limit		≥ 1412	2	15.21	limit	
wg125d005	125	372	0.05	≥ 3779	≥ 3390	limit		≥ 3779	3	5.39	limit	
wg125d010	125	767	0.10	≥ 2796	≥ 2175	limit		≥ 2796	0	18.5	limit	
wg125d015	125	1144	0.15	≥ 1991	≥ 1899	limit		≥ 1991	4	38.24	limit	
wg150d005	150	588	0.05	≥ 4381	≥ 3759	limit		≥ 4381	3	13.57	limit	
wg150d010	150	1167	0.10	≥ 3265	≥ 2533	limit		≥ 3265	9	40.68	limit	
wg150d015	150	1630	0.15	≥ 2828	≥ 2518	limit		≥ 2828	11	82.34	limit	

6.3 Graphs Arising from Coding Theory

The next experiments are performed on structured (unweighted) graphs arising from coding theory, obtained from [24]. We have used those instances that were solvable in reasonable time by the semidefinite programming solver (here reasonable means within 1000 seconds). For these instances, the value of α happened to be known already.

The results are reported in Table 2, which follows the same format as Table 1. It shows the same behaviour as the results on random graphs. Namely, our method always finds better solutions than the standard constraint programming solver, in less time or within the time limit. This is not surprising, because the edge density of these instances are exactly in the region in which our method is supposed to behave best (with the exception of 1dc.64 and 1zc.128), as analyzed in Section 6.1. Again, our method finds the best solutions at a low discrepancy. Note that the instance 1et.64 shows the strength of the semidefinite relaxation with respect to standard constraint programming. The difference in computation time to prove optimality is huge.

Table 2: Computational results on graphs arising from coding theory, with n vertices and m edges. All times are in seconds. The time limit is set to 1000 seconds.

instance					CP			SDP + CP				
name	n	m	edge density	α	α	total time	back-tracks	α	best discr	sdp time	total time	back-tracks
1dc.64	64	543	0.27	10	10	11.44	79519	10	0	5.08	5.09	0
1dc.128	128	1471	0.18	16	≥ 16	limit		16	0	49.95	49.98	0
1dc.256	256	3839	0.12	30	≥ 26	limit		30	0	882.21	882.33	0
1et.64	64	264	0.13	18	18	273.06	2312832	18	0	1.07	1.08	0
1et.128	128	672	0.08	28	≥ 28	limit		≥ 28	0	11.22	limit	
1et.256	256	1664	0.05	50	≥ 46	limit		≥ 50	0	107.58	limit	
1tc.64	64	192	0.10	20	≥ 20	limit		20	0	0.78	0.79	0
1tc.128	128	512	0.06	38	≥ 37	limit		38	0	8.14	8.18	0
1tc.256	256	1312	0.04	63	≥ 58	limit		≥ 63	4	72.75	limit	
1tc.512	512	3264	0.02	110	≥ 100	limit		≥ 110	2	719.56	limit	
1zc.128	128	2240	0.28	18	≥ 18	limit		≥ 18	4	129.86	limit	

Table 3: Computational results on graphs from the DIMACS benchmark set for maximum clique problems, with n vertices and m edges. All times are in seconds. The time limit is set to 1000 seconds.

instance				CP			SDP + CP					
name	n	m	edge density	α	total time	back-tracks	α	best discr	sdp time	total time	back-tracks	
hamming6-2	64	192	0.095	32	32	20.22	140172	32	0	0.68	0.69	0
hamming6-4	64	1312	0.651	4	4	0.28	804	4	0	27.29	28.10	706
hamming8-2	256	1024	0.031	128	≥ 128	limit		128	0	45.16	45.55	0
johnson8-2-4	28	168	0.444	4	4	0.05	255	4	0	0.35	0.35	0
johnson8-4-4	70	560	0.232	14	14	15.05	100156	14	0	4.82	4.83	0
johnson16-2-4	120	1680	0.235	8	≥ 8	limit		8	0	43.29	43.32	0
MANN _a 9	45	72	0.072	16	16	162.81	1738506	16	1	0.17	82.46	411104
MANN _a 27	378	702	0.010	126	≥ 103	limit		≥ 125	3	70.29	limit	
MANN _a 45	1035	1980	0.004	345	≥ 156	limit		≥ 338	1	1047.06	limit	
san200_0.9_1	200	1990	0.100	70	≥ 45	limit		70	0	170.01	170.19	0
san200_0.9_2	200	1990	0.100	60	≥ 36	limit		60	0	169.35	169.51	0
san200_0.9_3	200	1990	0.100	44	≥ 26	limit		44	0	157.90	157.99	0
sanr200_0.9	200	2037	0.102	42	≥ 34	limit		≥ 41	4	131.57	limit	

6.4 Graphs from the DIMACS Benchmarks Set

Our final experiments are performed on a subset of the DIMACS benchmark set for the maximum clique problem [25]. Although our method is not intended to be competitive with the best heuristics and exact methods for maximum clique problems, it is still interesting to see its performance on this standard benchmark set. As pointed out in Section 5, we have transformed these maximum clique problems to stable set problems on the complement graph.

The results are reported in Table 3, which again follows the same format as Table 1. The choice for this particular subset of instances is made by the solvability of an instance by a semidefinite programming solver in reasonable time (again, reasonable means 1000 seconds). For all instances with edge density smaller than 0.24, our method outperforms the standard constraint programming approach. For higher densities however, the opposite holds. This is exactly

Table 4: A comparison of different methods on graphs from the DIMACS benchmark set for maximum clique problems, with n vertices and m edges. All times are in seconds.

instance			Östergård		Régis			CP + SDP		
name	edge density	α	α	total time	α	total time	back-tracks	α	total time	back-tracks
hamming6-2	0.095	32	32	0.01	32	0.00	17	32	0.69	0
hamming6-4	0.651	4	4	0.01	4	0.00	42	4	28.10	706
hamming8-2	0.031	128	128	0.04	128	0.00	65	128	45.55	0
johnson8-2-4	0.444	4	16	0.01	4	0.00	14	4	0.35	0
johnson8-4-4	0.232	14	14	0.01	14	0.00	140	14	4.83	0
johnson16-2-4	0.235	8	8	0.27	8	11.40	250505	8	43.32	0
MANN _a 9	0.073	16	16	0.01	16	0.00	50	16	82.46	411104
MANN _a 27	0.010	126	> 10000		126	55.44	1258768	≥ 125	> 1000	
MANN _a 45	0.004	345	> 10000		≥ 345	> 43200		≥ 338	> 1000	
san200 _{0.9} 1	0.100	70	70	0.27	70	3.12	1040	70	170.19	0
san200 _{0.9} 2	0.100	60	60	4.28	60	7.86	6638	60	169.51	0
san200 _{0.9} 3	0.100	44	> 10000		44	548.10	758545	44	157.99	0
sanr200 _{0.9}	0.102	42	> 10000		42	450.24	541496	≥ 41	> 1000	

what could be expected from the analysis of Section 6.1. A special treatment has been given to instance MANN_a45. We stopped the semidefinite programming solver at the time limit of 1000 seconds, and used its intermediate feasible solution as if it were the optimal fractional solution. We then proceeded our algorithm for a couple of seconds more, to search for a solution up to discrepancy 1.

In Table 4 we compare our method with two methods that are specialized for maximum clique problems. The first method was presented by Östergård [26], and follows a branch-and-bound approach. The second method is a constraint programming approach, using a special constraint for the maximum clique problem, with a corresponding propagation algorithm. This idea was introduced by Fahle [27] and extended and improved by Régis [28]. Since all methods are performed on different machines, we need to identify a time ratio between them. A machine comparison from SPEC⁴ shows that our times are comparable with the times of Östergård. We have multiplied the times of Régis with 3, following the time comparison made in [28]. In general, our method is outperformed by the other two methods, although there is one instance on which our method performs best (san200_0.9_3).

7 Conclusion and Future Work

We have presented a method to use semidefinite relaxations within constraint programming. The fractional solution values of the relaxation serve as an indication for the corresponding constraint programming variables. Moreover, the solution value of the relaxation is used as a bound for the corresponding constraint programming objective function.

⁴<http://www.spec.org/>

We have implemented our method to find the maximum stable set in a graph. Experiments are performed on random weighted and unweighted graphs, structured graphs from coding theory, and on a subset of the DIMACS benchmarks set for maximum clique problems. Computational results show that constraint programming can greatly benefit from semidefinite programming. Indeed, the solution to the semidefinite relaxations turn out to be very informative. Compared to a standard constraint programming approach, our method obtains far better results. Specialized algorithms for the maximum clique problem however, generally outperform our method.

The current work has investigated the possibility of exploiting semidefinite relaxations in constraint programming. Possible future investigations include the comparison of our method with methods that use linear relaxations, for instance branch-and-cut algorithms. Moreover, one may investigate the effects of strengthening the relaxation by adding redundant constraints. For instance, for the stable set problem so-called clique-constraints (among others) can be added to both the semidefinite and the linear relaxation. Finally, the proof of optimality may be accelerated similar to a method presented in [1], by adding so-called discrepancy constraints to the semidefinite or the linear relaxation, and recompute the solution to the relaxation.

Acknowledgements

Many thanks to Michela Milano, Monique Laurent and Sebastian Brand for fruitful discussions and helpful comments while writing (earlier drafts of) this paper. Also thanks to the anonymous referees for useful comments.

References

- [1] M. Milano and W.J. van Hoeve. Reduced cost-based ranking for generating promising subproblems. In P. van Hentenryck, editor, *Eighth International Conference on the Principles and Practice of Constraint Programming (CP'02)*, volume 2470 of *LNCS*, pages 1–16. Springer Verlag, 2002.
- [2] W.J. van Hoeve. A Hybrid Constraint Programming and Semidefinite Programming Approach for the Stable Set Problem. In F. Rossi, editor, *Ninth International Conference on Principles and Practice of Constraint Programming (CP'03)*, volume 2833 of *LNCS*, pages 407–421. Springer Verlag, 2003.
- [3] F. Focacci, A. Lodi, and M. Milano. Exploiting relaxations in CP. In M. Milano, editor, *Constraint and Integer Programming: toward a unified methodology*, chapter 5. Kluwer Academic Publishers, 2004.
- [4] M.X. Goemans and D.P. Williamson. Improved Approximation Algorithms for Maximum Cut and Satisfiability Problems Using Semidefinite Programming. *Journal of the ACM*, 42(6):1115–1145, 1995.

- [5] S. E. Karisch, F. Rendl, and J. Clausen. Solving graph bisection problems with semidefinite programming. *INFORMS Journal on Computing*, 12(3):177–191, 2000.
- [6] K.R. Apt. *Principles of Constraint Programming*. Cambridge University Press, 2003.
- [7] W. D. Harvey and M. L. Ginsberg. Limited Discrepancy Search. In C. S. Mellish, editor, *Proceedings of the Fourteenth International Joint Conference on Artificial Intelligence (IJCAI-95)*; Vol. 1, pages 607–615, 1995.
- [8] C. Helmberg. Semidefinite Programming website.
<http://www-user.tu-chemnitz.de/~helmberg/semidef.html>.
- [9] F. Alizadeh. The Semidefinite Programming Page.
<http://new-rutcor.rutgers.edu/~alizadeh/sdp.html>.
- [10] M. Goemans and F. Rendl. Combinatorial Optimization. In H. Wolkowicz, R. Saigal, and L. Vandenbergh, editors, *Handbook of Semidefinite Programming*, pages 343–360. Kluwer, 2000.
- [11] M. Laurent and F. Rendl. Semidefinite Programming and Integer Programming. In K.Aardal, G. Nemhauser, and R. Weismantel, editors, *Discrete Optimization*, Handbooks in Operations Research and Management Science. Elsevier, 2004. Also available as Technical Report PNA-R0210, CWI, Amsterdam.
- [12] M. Grötschel, L. Lovász, and A. Schrijver. *Geometric Algorithms and Combinatorial Optimization*. John Wiley & Sons, 1988.
- [13] F. Alizadeh. Interior point methods in semidefinite programming with applications to combinatorial optimization. *SIAM Journal on Optimization*, 5(1):13–51, 1995.
- [14] M. Laurent, S. Poljak, and F. Rendl. Connections between semidefinite relaxations of the max-cut and stable set problems. *Mathematical Programming*, 77:225–246, 1997.
- [15] P.M. Pardalos and J. Xue. The Maximum Clique Problem. *SIAM Journal of Global Optimization*, 4:301–328, 1994.
- [16] I.M. Bomze, M. Budinich, P.M. Pardalos, and M. Pelillo. The Maximum Clique Problem. In D.-Z. Du and P.M. Pardalos, editors, *Handbook of Combinatorial Optimization*, volume 4. Kluwer, 1999.
- [17] C.H. Papadimitriou and K. Steiglitz. *Combinatorial Optimization: Algorithms and Complexity*. Prentice Hall, 1982.
- [18] L. Lovász. On the Shannon capacity of a graph. *IEEE Transactions on Information Theory*, 25:1–7, 1979.

- [19] G. Gruber and F. Rendl. Computational experience with stable set relaxations. *SIAM Journal on Optimization*, 13(4):1014–1028, 2003.
- [20] ILOG. ILOG Solver 5.1, Reference Manual, 2001.
- [21] B. Borchers. A C Library for Semidefinite Programming. *Optimization Methods and Software*, 11(1):613–623, 1999.
<http://www.nmt.edu/~borchers/csdp.html>.
- [22] R.C. Whaley, A. Petitet, and J.J. Dongarra. Automated empirical optimizations of software and the ATLAS project. *Parallel Computing*, 27(1–2):3–35, 2001.
<http://math-atlas.sourceforge.net/>.
- [23] E. Anderson, Z. Bai, C. Bischof, L.S. Blackford, J. Demmel, J.J. Dongarra, J. Du Croz, A. Greenbaum, S. Hammarling, A. McKenney, and D. Sorensen. *LAPACK Users' Guide*. SIAM, third edition, 1999.
<http://www.netlib.org/lapack/>.
- [24] N.J.A. Sloane. Challenge Problems: Independent Sets in Graphs.
<http://www.research.att.com/~njas/doc/graphs.html>.
- [25] DIMACS. DIMACS maximum clique benchmark, 1993.
<ftp://dimacs.rutgers.edu/pub/challenge/graph/benchmarks/clique>.
- [26] P.R.J. Östergård. A fast algorithm for the maximum clique problem. *Discrete Applied Mathematics*, 120:197–207, 2002.
- [27] T. Fahle. Simple and Fast: Improving a Branch-And-Bound Algorithm for Maximum Clique. In *10th Annual European Symposium on Algorithms (ESA 2002)*, volume 2461 of *LNCS*, pages 485–498. Springer Verlag, 2002.
- [28] J.-C. Régin. Using Constraint Programming to Solve the Maximum Clique Problem. In F. Rossi, editor, *Ninth International Conference on Principles and Practice of Constraint Programming (CP'03)*, volume 2833 of *LNCS*, pages 634–648. Springer Verlag, 2003.